

ezlo secure


The hub that always
keeps you in control




**Reset button & LED
Behavior guide**

ezlo innovation

Details

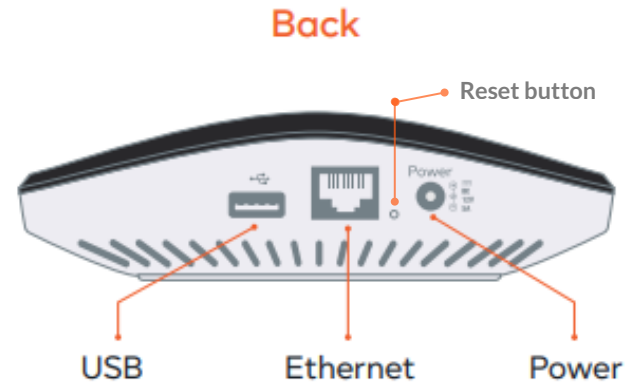

The reset button requires a pin or paperclip to be pressed.

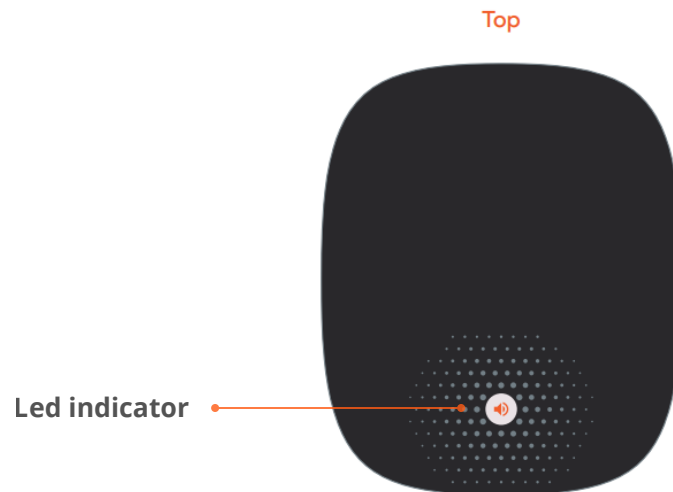

ezlo innovation

Reset button



RESET BUTTON ACTION

RESULT ACTION

LED STATUS

1 short (0.05 - 0,5 seconds) press
within 1.5 second

Send the broadcast message to cloud server

2 short (0.05 - 0,5 seconds) presses
within 1.5 second

Reset client connection Wi-Fi settings

3 short (0.05 - 0,5 seconds) presses
within 1.5 second

Perform hub Power off action

One long (2 - 5 seconds) press

Reboot controller

One long (5 - 10 seconds) press

Soft reset

One long (10 - 20 seconds) press

Factory reset

Holding more than 20 seconds

Cancel factory reset start

Two blinks



Fast blinking (4 times per second)



Fast blinking (twice per second)



Fast blinking (twice per second)



Slow blinking (once per second)

Reset logic



HUB ELEMENT

SOFT RESET

HARD RESET



LED Fast blinking (twice per second)



LED Slow blinking (once per second)

Included devices

Remove from hub, left in included state

Remove from hub, left in included state

Z-Wave network ID

Change to random value

Change to random value

WiFi settings

Don't change

Restore to defaults

Backups stored at controller

Don't change

Remove

Plugins data

Remove

Remove

Other user data

Remove

Remove

User addons and plugins

Don't change

Remove

Default addons and plugins

Don't change

Restore to defaults

 LED light color

Note: Holding more than 20 seconds will cancel the factory reset.

LED STATUS



Booting/Power on



Firmware is running and there is nothing else to notify



Slow waving (repetition time 5s)

The Ezlo Secure works from the battery



Slow blinking (once per second)

Firmware update



Fast blinking (twice per second)

The controller has connection to the Internet but it cannot establish connection with Cloud



Slow blinking (once per second)

Process of adding new smart device is started

Fast waving (twice per second)

Process of removing smart device is started

For support on the Ezlo Secure, email support@ezlo.com

ezlo innovation

